

GENERAL NOTES:

- ALL CONSTRUCTION TO CONFORM TO LOCAL BYLAWS AND THE N.B.C. -A-E
- DESIGN IS BASED ON AN ENGINEERED FLOOR JOIST SYSTEM - SEE ENGINEER'S DESIGN
- DESIGN IS BASED ON AN ENGINEERED ROOF TRUSS SYSTEM - SEE ENGINEER'S DESIGN
- EXTERIOR WALLS ARE SHOWN AS 6" THICK AND INCLUDE AN ALLOWANCE FOR 1/2" OF SHEATHING ON THE EXTERIOR
- INTERIOR WALLS ARE SHOWN AS 3 1/2", 5 1/2" OR 7 1/2" THICK - WALLBOARD REDUCES THE ROOM SIZES
- ALL DIMENSIONS ARE TAKEN TO THE FACE OF INTERIOR STUDS AND OUTSIDE FACE OF SHEATHING ON EXTERIOR WALLS AND OUTSIDE FACE OF CONCRETE WALLS
- ALL BEAMS (ENGINEERED OR DIMENSIONAL) TO BE SIZED / VERIFIED BY SUPPLIER
- ALL WINDOWS SUBJECT TO LOCAL BYLAWS AND MUST MEET CODE FOR EGRESS IN REQUIRED ROOMS
- WINDOW SIZES SHOWN ARE APPROXIMATE AND SHOULD BE VERIFIED WITH THE BUILDER / CONTRACTOR / OWNER PRIOR TO ORDERING / INSTALLATION - INCLUDING ROUGH OPENINGS / STYLE / TYPE / GRILLES
- ALL OVERHANGS SUBJECT TO LOCAL BYLAWS - WEeping TILE TO BE INSTALLED AROUND ALL STRIP FOOTINGS AND TIED TO DRAINAGE SYSTEM
- ALL WALLS / CEILING(S) / FLOORS / DOORS THAT ARE COMMON TO HOUSE AND GARAGE TO BE FIRE-RATED AND GAS-PROOFED TO MEET CODE
- GARAGE FLOOR LAYOUT (IF REQUIRED) TO BE DESIGNED AND VERIFIED BY A QUALIFIED STRUCTURAL ENGINEER
- ATTIC ACCESS(ES) TO BE MINIMUM 21 1/2"x23" AS PER N.B.C. -A.B. c/w WEATHERSTRIPPING AND INSULATION
- ROOF VENTS TO BE PROVIDED TO MEET CODE
- INSULATION STOPS TO BE INSTALLED AS REQUIRED
- SMOKE DETECTORS AND CARBON MONOXIDE DETECTORS TO BE PROVIDED TO MEET CODE
- FLASHING TO BE INSTALLED TO MEET CODE AND LOCAL REQUIREMENTS
- GRADE LINES ARE ESTIMATED ONLY AND SHOULD BE VERIFIED WITH A QUALIFIED SURVEYOR - ENTRY STEPS TO BE ADJUSTED ACCORDINGLY
- DECK SLOPE = MIN. 1/4" PER 12", MAX. 1/4" PER 12"
- MAIN FLOOR ELEVATION TO FRONT OF GARAGE SLAB ELEVATION TO BE VERIFIED WITH A QUALIFIED SURVEYOR
- MINIMUM 2" CLEARANCE TO BE MAINTAINED AROUND FURNACE AND FIREPLACE FLUES
- ALL GLASS SHOWER DOORS / WALLS MUST BE TEMPERED GLASS
- DRYER VENT TO BE 4" DIAMETER c/w HOOD
- ALL EXHAUST FANS TO GO TO EXTERIOR
- ALL WINDOWS 5'-0" AND OVER TO HAVE LINTEL SIZED BY SUPPLIER
- INTERIOR DOOR FRAMING HEIGHT TO BE 83" FOR 6'-8" DOOR, 99" FOR 8'-0" DOOR
- ALL CONSTRUCTION TO ADHERE TO ENERGY EFFICIENCY DETAILS & EFFECTIVE THERMAL RESISTANCE CALCULATIONS (RSI) SHOWN ON LATER PAGES OF THESE DRAWINGS IF BUILDING TO PRESCRIPTIVE PATH

ASPHALT SHINGLE ROOFING

24" OVERHANGS (TYP.) UNLESS OTHERWISE NOTED

8" BATTEN @ BASE OF SOFFIT

6" HORIZONTAL & VERTICAL BATTEN -AS SHOWN

T.O. SECOND FLOOR

8" FASCIA (TYP.)

COLUMN CONSTRUCTION:

- 16" x 18" CULTURED STONE BASE
- 8" BATTENS
- AS SHOWN/SEE DETAILS

HARDBOARD SIDING c/w HARDBOARD CORNERS

T.O. MAIN FLOOR

SMARTBOARD PANELING (OR EQUIVALENT)

-AS SHOWN

6" BATTENS AROUND FRONT & REAR WINDOWS & DOORS AS SHOWN

CULTURED STONE AS SHOWN

RAILING AT STAIRS / DECK / VERANDA TO MEET CODE

T.O. BSMT. FLOOR




FRONT ELEVATION

SCALE: 3/16" = 1'-0"

VERANDA ROOF DIMENSION IS FROM UNDERSIDE OF SOFFIT TO TOP OF MAIN FLOOR

GRADES ARE ESTIMATED - VERIFY WITH PLOT PLAN

MAIN FLOOR	=	883 sq.ft.
SECOND FLOOR	=	1118 sq.ft.
TOTAL	=	2001 sq.ft.
OPT. BSMT. DEV.	=	0 sq.ft.

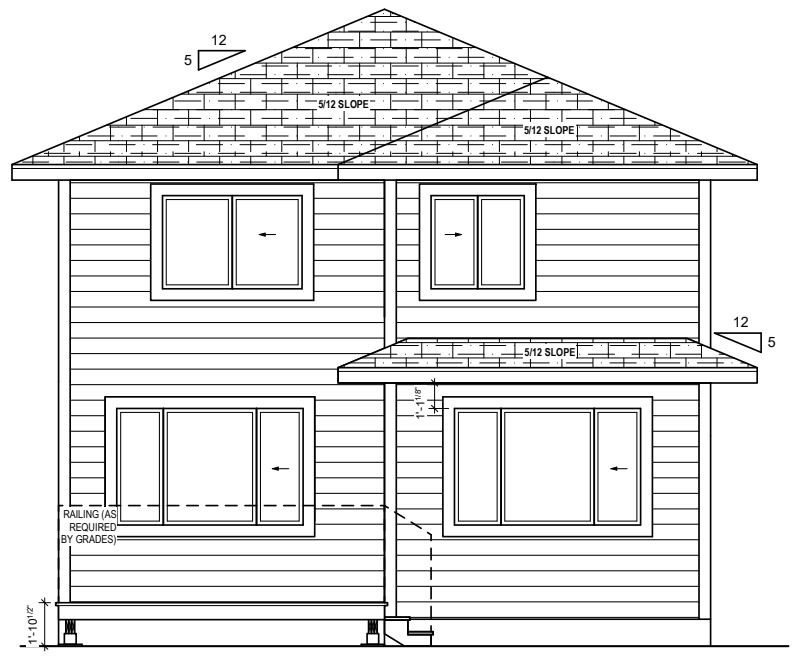

REAR ELEVATION

SCALE: 3/16" = 1'-0"

GRADES ARE ESTIMATED - VERIFY WITH PLOT PLAN

*** MAX 24" PARGING *** PROVIDE NAILING STRIPS IN FOUNDATION WALL FOR DROPPED SIDING AS REQUIRED

16854

Prepared by: **DRAW DESIGNS**
 #211, 236 - 91 St. SW
 EDMONTON, ALBERTA
 780.490.0234
 drafting@drawdesigns.ca
 www.drawdesigns.ca

Prepared for: **Blackwood Homes**
 442 Walker Road
 Edmonton, Alberta T5T 2X2
 Phone: 403.771.2630
 Email: stephen@blackwoodhomes.net

Project: **Lot 24 Eaglemont**

Version	001	August 24, 2022			

Legal: **Lot: 24 Block: 10**
Plan: 222.0812
Address: 6614 51 Ave

IF ALL DRAWINGS CONTAINED HEREIN ARE THE INTELLECTUAL PROPERTY OF DRAW DESIGNS Ltd. ANY REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED WITHOUT THE EXPRESSED WRITTEN PERMISSION OF DRAW DESIGNS Ltd.
 FAILURE TO COMPLY WILL RESULT IN PROSECUTION TO THE FULLEST EXTENT OF THE LAW.

2
17